



**Griffco Valve Inc.**

6010 North Bailey Ave, Ste 1B  
 Amherst, NY 14226  
 Phone: 1 716 835-0891  
 Fax: 1 716 835-0893

**Y - STRAINER**



**Features:**


- **Materials:** PVC, Clear PVC, CPVC
- **Horizontal or Vertical Installation**
- **2:1 Open Area Ratio**
- **Hex Cap for Easy Screen Access**
- **Standard Screen Perforation: 1/32"**  
(Others available on request)
- **Connections:** NPT, Socket, BSPT,
- **Sizes From 1/2" – 2"; DN15 – DN50**

**Options:**

- **316 SS Mesh or Perforated Screens**
- **True Union Connections**
- **Flanged Connections**
- **European Connections Available**  
(At no extra cost)



Griffco Y-Strainers are designed to enhance the performance of chemical feed systems. The addition of a Y-strainer to the suction side of the chemical feed pump prevents debris from entering the pump and clogging the check valves or damaging the interior of the pump head.

**TYPICAL INSTALLATION**

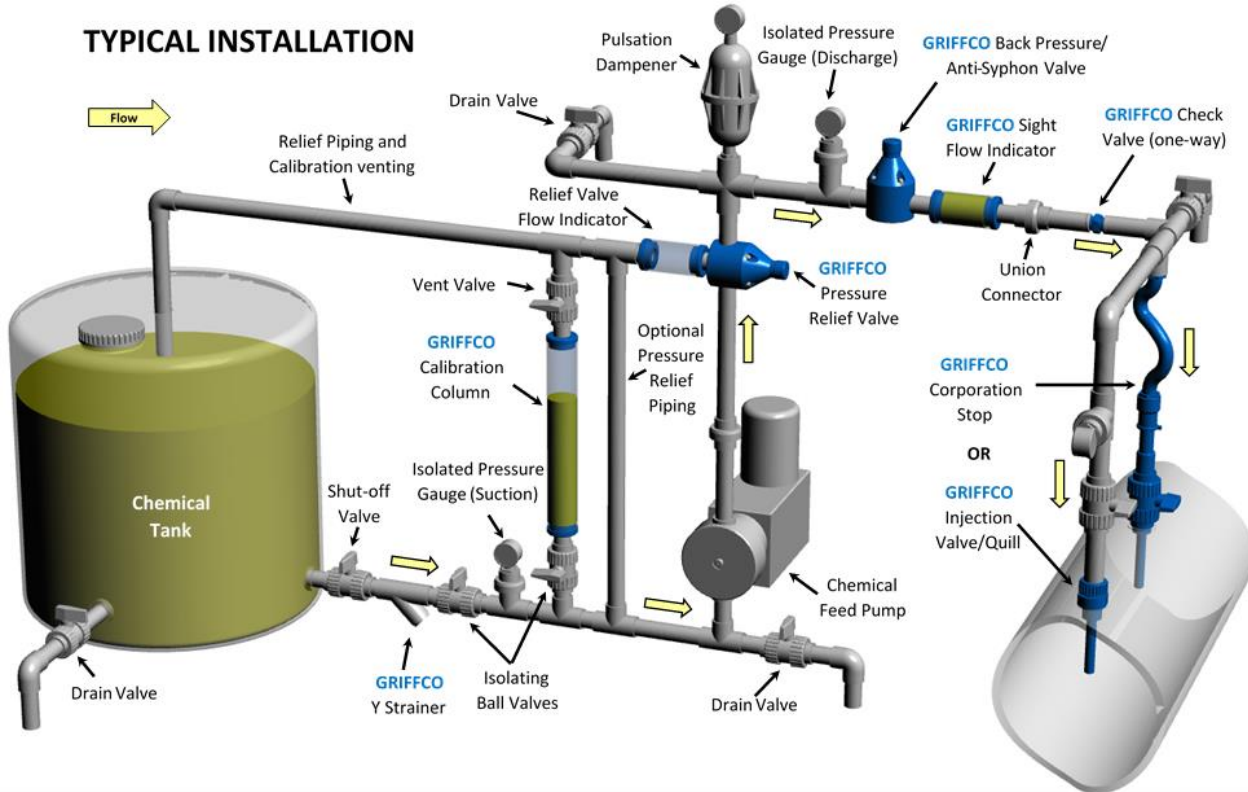

**Technical Data:**

<b>Model YS Sizes:</b>		1/2", 3/4", 1", 1 1/2", 2"	
<b>Connections:</b>		NPT, BSPT Socket, Union, Flange	
<b>Flow Coefficient</b>			
<b>Size</b>	<b>Cv Value</b>	<b>Pressure Loss Calculation Formula</b>	
1/2" – DN15	4.0	$\Delta P = (Q/Cv)^2$ $\Delta P = \text{Pressure Drop}$ $Q = \text{Flow in GPM}$ $Cv = \text{Flow Coefficient}$	
3/4" – DN20	6.8		
1" – DN 25	9.0		
1.5" – DN40	28		
2" – DN50	28		
<b>Max Temperature:</b>		PVC / CLEAR PVC: 140°F (60°C) ; CPVC 190° (87°C)	
<b>Max Operating Pressure(psi) @ 70 Deg. F</b>		150 PSI	
<b>Basket Options</b>			
<b>Perforations Sizes (PVC, CPVC, PP)</b>		1/32", 1/16", 1/8", 3/16"	
<b>Perforations Sizes (SSTL, Hast C, Monel, Titanium)</b>		1/32", 1/16", 1/8", 3/16" (Mesh Sizes: 20, 40, 60, 80, 100, 200, 325)	
<b>O-Ring Material</b>		FPM & EPDM	

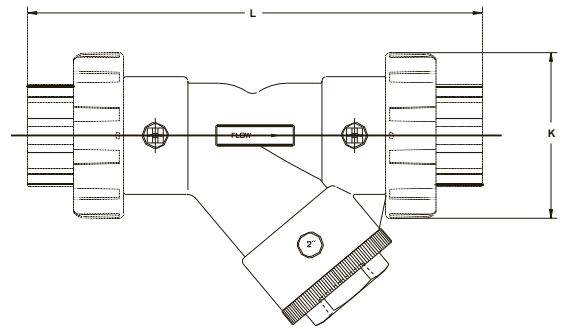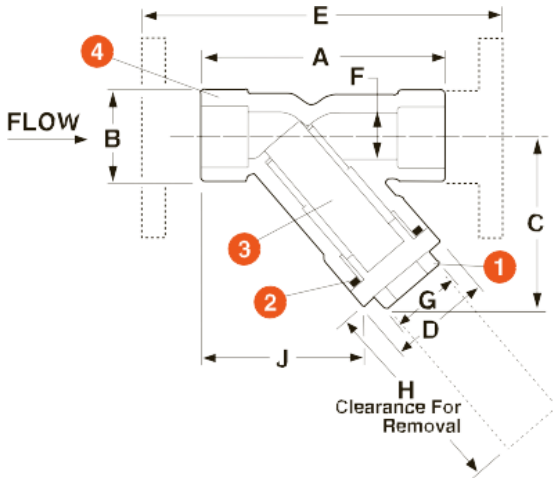

**DIMENSIONS (Inches)**

Size in	A in	B in	C in	D in	E in	F in	G in	H in	J in	K in	L in	WEIGHT (lbs)	
												SOC/TRD	FLANGE
1/2	3.36	1.38	2.25	1.50	5.42	.56	1.00	2.13	2.50	2.25	6.64	.25	
3/4	4.18	1.69	2.88	2.00	6.43	.81	1.25	2.75	3.00	2.63	7.42	.63	
1	5.19	2.00	3.63	2.16	7.75	1.00	1.50	3.30	3.32	3.00	8.97	.88	
1.5	6.63	2.63	4.50	2.94	9.69	1.56	2.00	4.50	4.45	4.75	12.07	1.63	
2	7.63	3.38	5.38	3.75	11.00	2.00	2.38	5.06	4.88	4.75	13.05	3.00	

**DIMENSIONS (mm)**

Size DN	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	J mm	K mm	L mm	WEIGHT (kg)	
												SOC/TRD	FLANGE
15	86	36	58	39	133	15	26	55	64	58	169	.11	
20	107	43	74	51	163	21	32	70	77	67	189	.29	
25	132	51	93	55	197	26	39	84	85	77	228	.40	
40	169	67	115	75	246	40	51	115	114	121	307	.74	
50	194	86	137	96	280	51	61	129	124	121	331	1.36	